


# SX5032AU

**AUTOMOTIVE, AEC-Q200**



**General Description**

The SX5032 is a sealing crystal unit specific for applications, which require high mechanical reliability and wide operating temp. range

**Features**

Wide operating temp. range  
 Superior performance in harsh environment  
 contains Pb in sealing glass exmpted by RoHS directive

**Main applications**


TPMS, ECM, ABS, sensors

**Electrical characteristics**

Item	Symbol	Values
Part number		SX5032AU
Mode of vibration		Fund.
Frequency range	F	9.5 - 40 MHz
Frequency tolerance (@ +25°C)	$\Delta f/F$	$\pm 30\text{ppm}$ or specify
Frequency stability	$\Delta f/F$	$\pm 50\text{ppm}$ [-40°C / +85°C]
Operating temp. range	To	-40°C / +125°C
Storage temp. range	Ts	-40°C / +150°C
Load capacitance	Cl	12pF or specify
Equivalent serie resistance	ESR	see table 1
Drive level	P	0.2mW
Reliability standard		AEC-Q200

Table 1	ESR
9.5 - 10 MHz	150Ω max
10 - 12 MHz	100Ω max
12 - 20 MHz	80Ω max
20 - 40 MHz	60Ω max

**Dimensions**

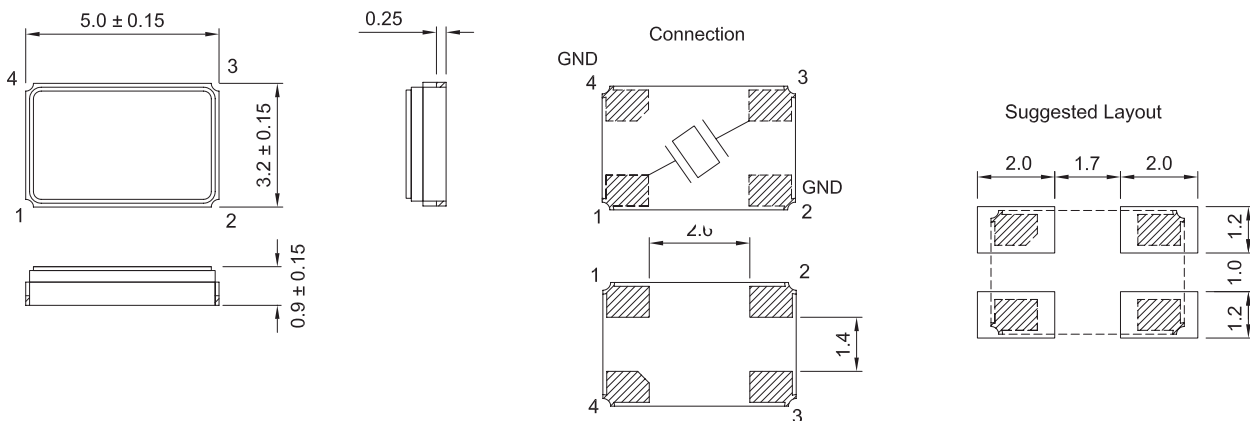

Remark : specifications subject to change without prior notice. Please confirm with our sales

# Quartz Crystal Resonator (MHz)

## SX5032AU

### Part Number Generator

<b>SX5032AU</b>	<b>10.000000</b>	<b>F</b>	<b>AT</b>	<b>P20</b>	<b>E</b>	<b>F</b>	<b>H</b>	<b>TR</b>	<b>xxx</b>
0	1	2	3	4	5	6	7	8	9

**0** : Holder  
SX5032AU

**1** : Frequency (MHz)  
□□□.□□□□□□  
max 10 digits including comma

**2** : Vibration mode  
F = Fund.

**3** : Cut  
AT

**4** : Load capacitance  
S=Serie  
P20=20pF  
P30=30pF  
etc

**5** : Tolerance  
A=  $\leq \pm 30$ ppm  
C=  $\leq \pm 20$ ppm

**6** : Op. temp. range  
N=-40/+85  
T=-40/+125

**7** : Stability  
A1 <  $\pm 100$ ppm  
A <  $\pm 50$ ppm

**8** : Packing  
TR = Tape & Reel

**9** : Customized code  
Note : factory use

Remark : specifications subject to change without prior notice. Please confirm with our sales

